

CITY COUNCIL

Pedro "Pete" M. Sanchez, Mayor
Mike Hudson, Mayor Pro-Tem
Jane Day
Sam Derting
Michael A. Segala



CITY COUNCIL MEETING

First and Third Tuesday
Every Month

CITY OF SUISUN CITY

701 Civic Center Blvd.
Suisun City, California 94585
Incorporated October 9, 1868

January 31, 2012

Mr. Bruce Wolfe, Executive Officer
San Francisco Bay Regional Water Quality Control Board
1515 Clay Street, Suite 1400
Oakland, CA 94612

Attention: Ms. Jolanta Uchman, Water Resources Control Engineer

Reference: Fairfield-Suisun Urban Runoff Management Program
FY 2010-2011 Annual Report

Dear Mr. Wolfe:

The attached FY2010-2011 Annual Report represents the City of Suisun City's response to the items requested per Provision C.16 of NPDES Permit No. CA S612008 (Permit) as adopted on October 14, 2009 via Order No. R2-2009-0074.

I certify under penalty of law that this document was prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Sincerely,

for
Daniel Kasperson
Building & Public Works Director

Attachment

cc: Dale Bowyer, RWQCB

DEPARTMENTS: AREA CODE (707)

ADMINISTRATION 421-7300 ■ PLANNING 421-7335 ■ BUILDING 421-7310 ■ FINANCE 421-7320
FIRE 425-9133 ■ RECREATION & COMMUNITY SERVICES 421-7200 ■ POLICE 421-7373 ■ PUBLIC WORKS 421-7340
REDEVELOPMENT AGENCY 421-7309 FAX 421-7366

Baseline Trash Load and Short-Term Trash Load Reduction Plan



Submitted by:

**Lee Braddock Evans
City of Suisun City
701 Civic Center Blvd.
Suisun City, CA 94585**

In compliance with Provisions C.10.a(i) and C.10.a(ii) of Order R2-2009-0074

February 1, 2012

Page Intentionally Left Blank

CITY COUNCIL

Pedro "Pete" M. Sanchez, Mayor
Mike Hudson, Mayor Pro-Tem
Jane Day
Sam Derting
Michael A. Segala



CITY COUNCIL MEETING

First and Third Tuesday
Every Month

CITY OF SUISUN CITY

701 Civic Center Blvd.
Suisun City, California 94585
Incorporated October 9, 1868

FEBRUARY 1, 2012

**CITY OF SUISUN CITY
SHORT-TERM TRASH LOAD REDUCTION PLAN**

CERTIFICATION STATEMENT

"I certify, under penalty of law, that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to ensure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted, is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Signature by Duly Authorized Representative:

Daniel A. Kasperson
Building and Public Works Director

DEPARTMENTS: AREA CODE (707)

ADMINISTRATION 421-7300 ■ PLANNING 421-7335 ■ BUILDING 421-7310 ■ FINANCE 421-7320
FIRE 425-9133 ■ RECREATION & COMMUNITY SERVICES 421-7200 ■ POLICE 421-7373 ■ PUBLIC WORKS 421-7340
REDEVELOPMENT AGENCY 421-7309 FAX 421-7366

ABBREVIATIONS

| | |
|-------------|---|
| BASMAA | Bay Area Stormwater Management Agencies Association |
| BID | Business Improvement District |
| CalRecycle | California Department of Resources Recycling and Recovery |
| Caltrans | California Department of Transportation |
| CASQA | California Stormwater Quality Association |
| CDS | Continuous Deflection Separator |
| CEQA | California Environmental Quality Act |
| CY | Cubic Yards |
| EIR | Environmental Impact Report |
| EPA | Environmental Protection Agency |
| GIS | Geographic Information System |
| MRP | Municipal Regional Stormwater NPDES Permit |
| MS4 | Municipal Separate Storm Sewer System |
| NGO | Non-Governmental Organization |
| NPDES | National Pollutant Discharge Elimination System |
| Q | Flow |
| SFRWQCB | San Francisco Regional Water Quality Control Board |
| SWRCB | State Water Resource Control Board |
| TMDL | Total Maximum Daily Load |
| USEPA | United States Environmental Protection Agency |
| Water Board | San Francisco Regional Water Quality Control Board |
| WDR | Waste Discharge Requirements |

PREFACE

This Baseline Trash Load and Short-Term Trash Load Reduction Plan (Plan) is submitted in compliance with Provision C.10.a(i) and C.10.a(ii) of the Municipal Regional Stormwater NPDES Permit (MRP) for Phase I communities in the San Francisco Bay (Order R2-2009-0074). This Plan was developed using a regionally consistent format developed by the Bay Area Stormwater Management Agencies Association (BASMAA). Based on new information that becomes available during the implementation of this Short-Term Plan (e.g., revisions to baseline loading estimates or load reduction credits of quantification formulas), the City of Suisun City may choose to amend or revise this Plan. If revisions or amendments are necessary, a revised Short-Term Trash Reduction Plan will be submitted to the Water Board via the City of Suisun City's annual reporting process.

1.0 INTRODUCTION

The Municipal Regional Stormwater NPDES Permit for Phase I communities in the San Francisco Bay area (Order R2-2009-0074), also known as the Municipal Regional Permit (MRP), became effective on December 1, 2009. The MRP applies to 76 large, medium and small municipalities (cities, towns and counties) and flood control agencies in the San Francisco Bay Region, collectively referred to as Permittees. Provision C.10 of the MRP (Trash Load Reduction) requires Permittees to reduce trash from their Municipal Separate Storm Sewer Systems (MS4s) by 40 percent before July 1, 2014.

Required submittals to the San Francisco Bay Regional Water Quality Control Board (Water Board) by February 1, 2012 under MRP Provision C.10.a (Short-Term Trash Loading Reduction Plan) include:

- (a) Baseline trash load estimate, and (b) Description of the methodology used to determine the load level.
- A description of the Trash Load Reduction Tracking Method that will be used to account for trash load reduction actions and to demonstrate progress and attainment of trash load reduction levels.
- A Short-Term Trash Loading Reduction Plan that describes control measures and best management practices that will be implemented to attain a 40 percent trash load reduction from its MS4 by July 1, 2014.

This Short-Term Trash Load Reduction Plan (Trash Reduction Plan) is submitted by the City of Suisun City in compliance with the portions of MRP Provision C.10.a(i) listed as 1a and 3 above. In compliance with 1b, BASMAA submitted a progress report on behalf of Permittees that briefly describes the methodologies used to develop trash baseline loads (BASMAA 2011a). These methods are more fully described in BASMAA (2011b, 2011c). Lastly, the *Trash Load Reduction Tracking Method Technical Report* (BASMAA 2011d) was submitted by BASMAA on behalf of Permittees in compliance with submittal 2 described above. The Baseline Loading Rates and Tracking Method projects are briefly described below.

Baseline Trash Generation Rates Project

Through approval of a BASMAA regional project, Permittees agreed to work collaboratively to develop a regionally consistent method to establish baseline trash loads from their MS4s. The project, also known as the *BASMAA Baseline Trash Generation Rates Project* assists Permittees in establishing a baseline to demonstrate progress towards MRP trash load reduction goals (i.e., 40 percent). The intent of the project was to provide a scientifically-sound method for developing (default) baseline trash generation rates that can be adjusted, based on Permittee/site specific conditions; and used to develop baseline loading rates and loads. Baseline loads form the reference point for comparing trash load reductions achieved through control measure implementation.

Baseline trash loading rates are quantified on a volume per unit area basis and based on factors that significantly affect trash generation (e.g., land use, population density, and economic profile). The method used to establish baseline trash loads for each Permittee builds off "lessons learned" from previous trash loading studies conducted in urban areas (Allison and Chiew 1995; Allison et al. 1998; Armitage et al. 1998; Armitage and Rooseboom 2000; Lippner et al. 2001; Armitage 2003; Kim et al. 2004; County of Los Angeles 2002, 2004a, 2004b; Armitage 2007). The method is based off a conceptual

model developed as an outgrowth of these studies (BASMAA 2011b). Baseline trash loading rates were developed through the quantification and characterization of trash captured in Water Board recognized full-capture treatment devices installed in the San Francisco Bay area. Methods used to develop trash baseline loading rates are more fully described in BASMAA (2011b, 2011c, and 2012).

Trash Load Reduction Tracking Method Summary

The trash load reduction tracking method, described in the *Trash Load Reduction Tracking Method Technical Report*, assists Permittees in demonstrating progress towards reaching trash load reduction goals defined in the MRP (e.g., 40 percent). The tracking method is based on information gained through an extensive literature review and Permittee experiences in implementing stormwater control measures in the San Francisco Bay Area. The literature review was conducted to evaluate quantification methods used by other agencies to assess control measure effectiveness or progress towards quantitative goals. Results are documented in the *Trash Load Reduction Tracking Method: Technical Memorandum # 1 – Literature Review* (BASMAA 2011d).

Methods attributable to specific trash control measures fall into two categories: 1) trash load reduction quantification formulas; and 2) load reduction credits (BASMAA 2011e). Quantification formulas were developed for those trash control measures that were deemed feasible and practical to quantify load reductions at this time. Load reduction credits were developed for all other control measures included in the methodology development. Both categories of methods assume that as new or enhanced trash control measures are implemented by Permittees, a commensurate trash load reduction will occur. Progress towards load reduction goals will be demonstrated through comparisons to established trash baseline load estimates developed through the BASMAA *Baseline Generation Rates Project*.

Short-Term Trash Load Reduction Plan

The purpose of this Trash Load Reduction Plan is to describe the current level of implementation of control measures and best management practices, and identify the type and extent to which new or enhanced control measures and best management practices will be implemented to attain a 40 percent trash load reduction from their MS4 by July 1, 2014. The Short-Term Plan was developed using a template created by BASMAA through a regional project. New and enhanced trash control measures (i.e., Best Management Practices) that Permittees may implement to demonstrate trash load reduction goals are included in Table 1.1. This list was developed collaboratively through the BASMAA Trash Committee, which included participation from Permittee, stormwater program, Water Board and non-governmental organization (NGO) staff. The list of control measures is based on: 1) the potential for Permittees to implement; 2) the availability of information required to populate formulas and develop credits; and 3) the expected benefit of implementation. Load reductions associated with each control measure are demonstrated either through a quantification formula (QF) or credits (CR) described in the *Trash Load Reduction Tracking Method Technical Report* (BASMAA 2011e).

In efforts to reduce trash discharged from MS4s, Permittees may choose to implement control measures that are not included in Table 1.1 or described more fully in BASMAA (2011e). If a Permittee chooses to do so, methods specific to calculating trash load reductions for that control measure would need to be developed. Additionally, at that point, consideration should be given to updating this Trash Load Reduction Plan.

Additionally, based on new information that becomes available during the implementation of this Trash Load Reduction Plan (e.g., revisions to baseline loading estimates or load reduction credits of quantification formulas), the City of Suisun City may amend or revise this Plan. If revisions or amendments are necessary, a revised Short-Term Trash Load Reduction Plan will be submitted to the Water Board via the City of Suisun City's annual reporting process.

Table 1.1. Trash control measures for which load reduction quantification credits or formulas were developed to track progress towards trash load reduction goals.

| Load Reduction Credits |
|---|
| Single-use Carryout Plastic Bag Ordinances |
| Polystyrene Foam Food Service Ware Ordinances |
| Public Education and Outreach Programs |
| Activities to Reduce Trash from Uncovered Loads |
| Anti-Littering and Illegal Dumping Enforcement Activities |
| Improved Trash Bin/Container Management Activities |
| Single-Use Food and Beverage Ware Ordinances |
| Quantification Formulas |
| On-Land Trash Pickup (Volunteer and/or Municipal) |
| Enhanced Street Sweeping |
| Partial-Capture Treatment Devices |
| Enhanced Storm Drain Inlet Maintenance |
| Full-Capture Treatment Devices |
| Creek/Channel/Shoreline Cleanups (Volunteer and/or Municipal) |

This Trash Reduction Plan is organized into the following sections:

- Introduction
- Trash Baseline Load Estimate
- Load Reduction Calculation Process
- Planned Implementation of New or Enhanced Control Measures
- Implementation Schedule
- References

2.0 BASELINE TRASH LOADING ESTIMATE

***Note:** Tables and information presented in this section are subject to change based on the results of a third monitoring event of the BASMAA Baseline Trash Loading Rates Project. Therefore, this section of the Short-Term Trash Load Reduction Plan may be updated with revised trash generation rates, baseline loading rates, and baseline loads.*

This section provides the estimated annual trash baseline load from the City of Suisun City's Municipal Separate Storm Sewer System (MS4). In compliance with Provision C.10.a.(ii) of the MRP, the City of Suisun City worked collaboratively with other MRP Permittees through BASMAA to develop data and the process necessary to establish baseline trash loading estimate from our MS4. The collaborative project was managed through the BASMAA Trash Committee and included a series of steps described in BASMAA (2012) and listed below. The approach was intended to be cost-effective and consistent, but still provide an adequate level of confidence in trash loads from MS4s, while acknowledging that uncertainty in trash loads still exists. The approach entailed the following steps:

1. Conduct literature review
2. Develop conceptual model
3. Develop and implement sampling and analysis plan
4. Test conceptual model
5. Develop and apply default trash generation rates to Permittee effective loading areas
6. Adjust default trash generation rates based on baseline levels of control measure implementation by the Permittee to develop trash baseline loading rates
7. Calculate Permittee-specific annual trash baseline load

Through the collaborative BASMAA project, default baseline trash generation rates (volume per area) were developed for a finite set of categories, based on factors that significantly affect trash loads (e.g., land use). These trash generation rates were then applied to effective loading areas in applicable jurisdictional areas within the City of Suisun City. Trash generation rates were then adjusted based on baseline street sweeping, storm drain inlet maintenance, and stormwater pump station maintenance conducted in each applicable area. The sum of the trash loads (i.e., rate multiplied by area) from each effective loading area represents the City of Suisun City's baseline trash load from its MS4. A full description of the methods by which trash baseline loads were developed is included in BASMAA (2012a) and is summarized below.

Permittee Characteristics

The City of Suisun City covers 2,634 acres in Solano County, and has a jurisdictional area of 2,047 acres. According to the 2010 Census, it has a population of 28,111, with a population density of 6,752.6 people per square mile, and average household size of three. Of the 28,111 who call the City of Suisun City home, 27.5% are under the age of 18, 10.5% are between 18 and 24, 27.9% are between 25 and 44, 26.4% are between 45 and 65, and 7.7% are 65 or older.

The City is mainly residential, but does have a small downtown area on the waterfront. The median household income was \$60,848 in 2000¹.

¹ From the 2000 Census. The median household income for the City of Suisun City from the 2010 Census is not currently available.

Default Trash Generation Rates (Regional Approach)

A set of default trash generation rates was developed via the BASMAA regional collaborative project (BASMAA 2012a). Default generation rates were developed based on a comparison between trash characterization monitoring results, land uses, economic profiles, and other factors that were believed to possibly affect trash generation. Three trash characterization monitoring events were scheduled via the *Trash Loading Rates Project*. Due to the compliance timeline in the MRP, only two of three trash characterization monitoring events were used to develop trash generation rates described in BASMAA (2012a) and presented in this section. Following the completion of the third characterization event (Winter 2011/12), this section of the Short-Term Trash Reduction Plan may be updated to reflect the most up-to-date trash generation and loading rates available. Trash generation rates based on the results of two of the three characterization events are shown in Table 2-1 for each trash loading category.

Table 2-1: Regional Default Annual Trash Generation Rates by Land Use Category.

| Land Use Category | Generation Rates (Gallons/Acre) |
|---|------------------------------------|
| Retail and Wholesale | 29.99 |
| High Density Residential | 17.04 |
| K-12 Schools | 13.14 |
| Commercial and Services/ Heavy, Light and Other Industrial | 7.08 |
| Urban Parks | 2.14 |
| Low Density Residential | 1.25 |
| Rural Residential | 0.17 |

Jurisdictional and Effective Loading Areas

Default trash baseline generation rates presented in Table 2-1 were applied to effective loading areas with jurisdictional areas within the City of Suisun City. The City of Suisun City's jurisdictional areas include all urban land areas within the City of Suisun City boundaries that are subject to the requirements in the MRP. Land use areas identified by a combination of the ABAG 2005 land use dataset and Permittee knowledge that were not included within the City's jurisdictional areas include:

- Federal and State of California Facilities and Roads (e.g., Interstates, State Highways, Military Bases, Prisons)
- Roads Owned and Maintained by Solano County

- Colleges and Universities (Private or Public)
- Non-Urban Land Uses (e.g., Agriculture, Forest, Rangeland, Open Space, Wetlands, Water)
- Communication or Power Facilities (e.g., PG & E Substations)
- Water and Wastewater Treatment Facilities
- Other Transportation Facilities (e.g., Airports, Railroads, and Maritime Shipping Ports)

Once the City of Suisun City's jurisdictional area was delineated, an effective trash loading area was developed by creating a 200-foot buffer around all streets within the City's jurisdictional area. The purpose of the effective loading area is to eliminate land areas not directly contributing trash to the City's MS4 (e.g., large backyards and rooftops). Both the jurisdictional and the effective loading areas for the City of Suisun City are presented in Table 2-2.

Table 2-2: Jurisdictional areas and effective loading areas in the City of Suisun City by land use classes identified by ABAG (2005).

| Land Use Category | Jurisdictional Area (Acres) | Effective Loading Area (Acres) | % of Effective Loading Area |
|---|-----------------------------|--------------------------------|-----------------------------|
| High Density Residential | 11 | 11 | 1 |
| Low Density Residential | 1,735 | 1,679 | 91 |
| Rural Residential | 19 | 15 | 1 |
| Commercial and Services/ Heavy, Light and Other Industrial | 68 | 49 | 3 |
| Retail and Wholesale | 58 | 45 | 2 |
| K-12 Schools | 34 | 21 | 1 |
| Urban Parks | 121 | 30 | 2 |
| TOTAL | 2,047 | 1,851 | 100% |

Permittee-Specific Baseline Trash Loading Rates

Regional default trash generation rates developed through the BASMAA regional collaborative project were applied to effective loading areas within the City of Suisun City based on identified land uses. These generation rates were then adjusted based on the calculated effectiveness of baseline street sweeping, storm drain inlet maintenance and pump station maintenance implemented by the City. These adjustments were conducted in GIS due to the site specificity of baseline generation rates and baseline control measure implementation. The following sections describe the baseline level of implementation for these three control measures. A summary of trash baseline generation and loading rates for the City of Suisun City are provided in Table 2-3 and areas associated with these rates are illustrated in Figure 2-1.

Baseline Street Sweeping

A "baseline" street sweeping program is defined as the sweeping frequency and parking enforcement implemented by the City of Suisun City prior to effective date of the MRP. Baseline street sweeping differs from "enhanced" street sweeping, which includes increased parking enforcement and/or sweeping conducted at a frequency greater than baseline ceiling (i.e., once per week for retail land uses and twice per month for all other land uses). The baseline ceiling was created to not penalize implementers of enhanced street sweeping programs prior to the effective date of the MRP. For those Permittees that sweep less frequent than the baseline ceiling, their current sweeping frequency serves as their baseline.

The City of Suisun City's baseline street sweeping program includes sweeping most streets in residential areas once per month, the downtown area three times per month, and sweeping most arterials roads twice per month. The City's current street sweeping program includes sweeping most streets in residential areas once per month, the downtown areas three times per month, and sweeping arterial roads three times per month. There is additional sweeping during leaf season for two and a half months on some of the City's arterial roads.

Parking enforcement signs for street sweeping are not posted in the City. Parking enforcement equivalent exists in the downtown area and on most arterial roads. The estimated trash load reduced via baseline street sweeping is presented in Table 2-3.

Baseline Storm Drain Inlet Maintenance

Within the City, storm drain inlets were cleaned at a baseline level of one time per year prior to the effective date of the MRP. Based on this baseline frequency and the effectiveness rating developed in BASMAA (2012b), the baseline storm drain maintenance program in the City of Suisun City has an annual effectiveness rating of 5%. The estimated trash load reduced via baseline street sweeping is presented in Table 2-3.

Baseline Stormwater Pump Station Maintenance

The City of Suisun City owns and maintains four stormwater pump stations. Of these stations, all four have trash racks that capture trash and allow for removal during maintenance. The estimated volume of trash removed annually from each pump station prior to the effective date of the MRP is considered the baseline level of implementation. To determine the baseline volume of trash removed from pump stations, an effectiveness rating of 25% removal of the baseline trash load attributable to the area draining to the pump station is assumed. This effectiveness rating is based on methods developed in BASMAA (2012b). The estimated trash load reduced via baseline pump station maintenance is presented in Table 2-3.

Baseline Trash Loading Estimate

The estimated baseline trash load from the City of Suisun City was calculated as the sum of the loads from the City's effective loading area, adjusted for baseline implementation of street sweeping, storm drain inlet maintenance, and pump station maintenance. The preliminary annual trash baseline load for the City of Suisun City is presented in Table 2-3. Preliminary baseline trash loading rates are presented in Figure 2-1 to provide a geographical illustration of areas with estimated low, moderate, high and very high trash loading rates.

Table 2-3: Preliminary annual trash baseline load for the City of Suisun City.

| Category | Annual Load (gallons) |
|---|--------------------------|
| Preliminary Generation Trash Load | 4,337 |
| Load Removed via Baseline Street Sweeping | 1,505 |
| Load Removed via Baseline Storm Drain Inlet Maintenance | 142 |
| Load Removed via Baseline Stormwater Pump Station Maintenance | 177 |
| Preliminary Trash Baseline Load | 2,514 |

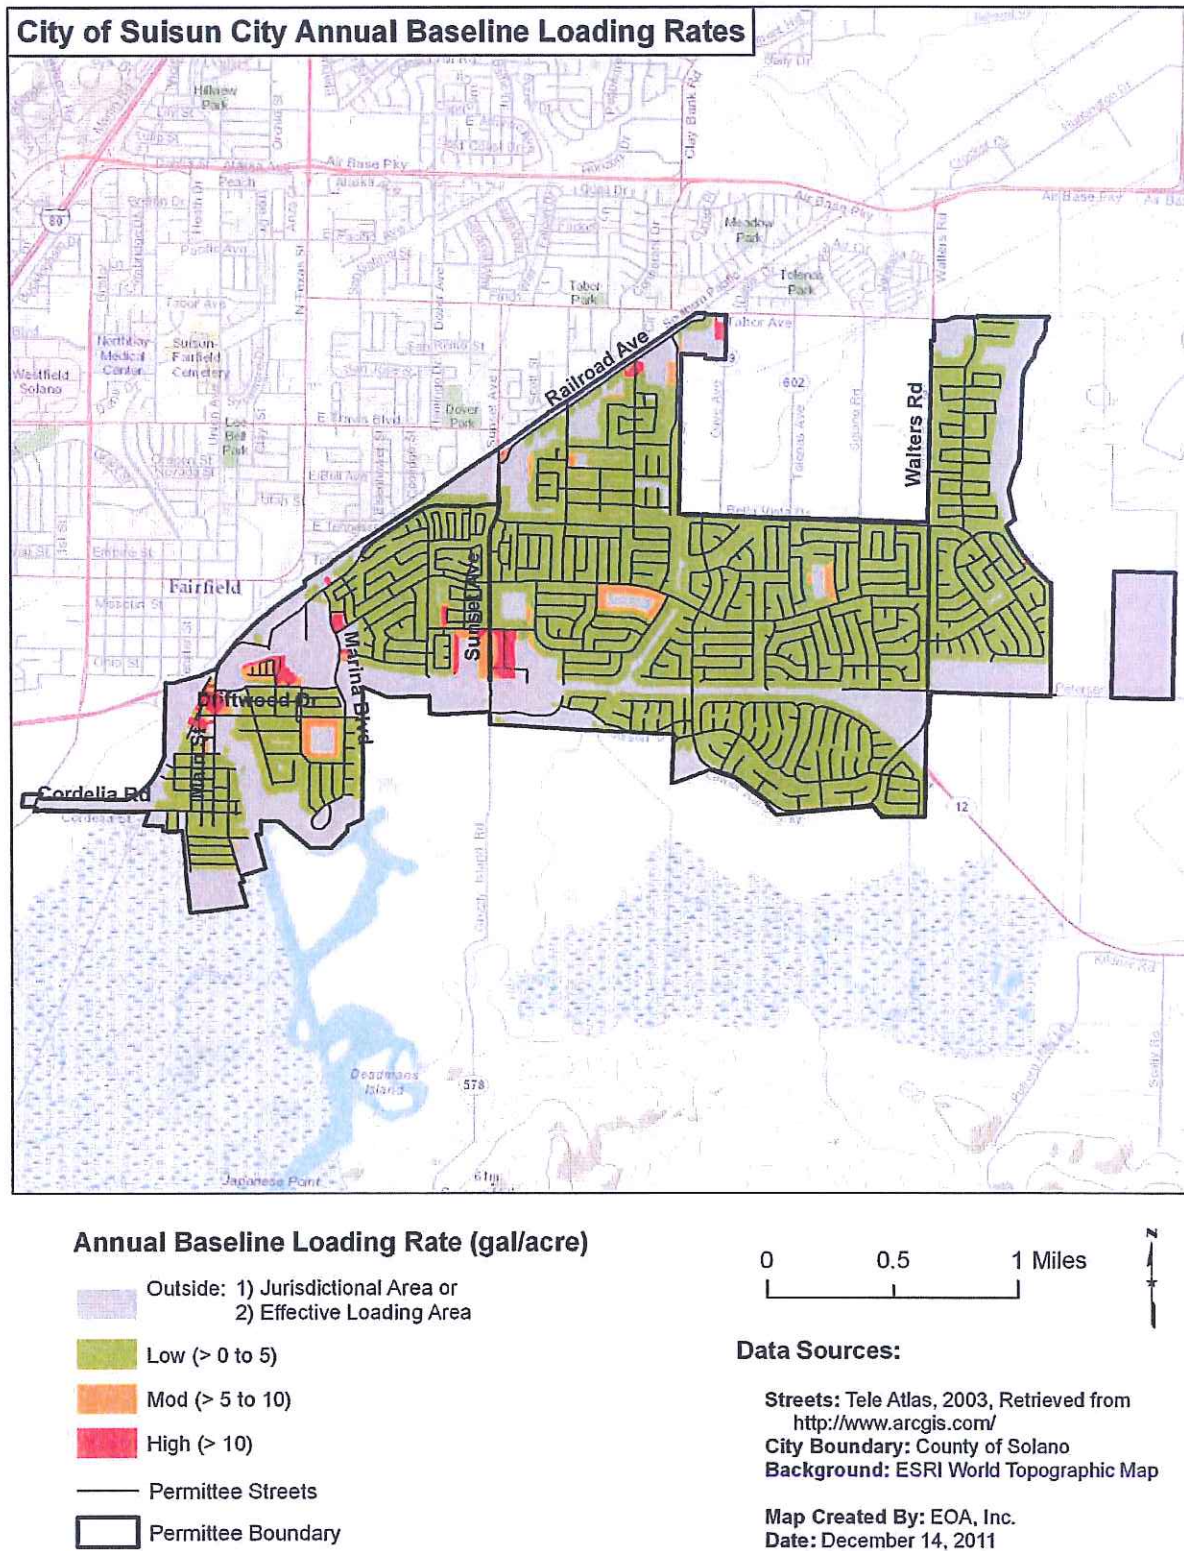


Figure 2-1: Estimated trash baseline loading rates for geographical areas in the City of Suisun City.

3.0 LOAD REDUCTION CALCULATION PROCESS

Using the guiding principles and assumptions described in BASMAA (2011e), a stepwise process for calculating trash load reductions was developed collaboratively through BASMAA. This process is fully described in Trash Load Reduction Tracking Method Technical Report (BASMAA 2011e) and is briefly summarized in this section. The process takes into at what point in the trash generation and transport process a trash control measure: 1) prevents trash generation, 2) intercepts trash in the environment prior to reaching a water body, or 3) removes trash that has reached a water body. In doing so, it avoids double-counting of trash load reductions associated with specific control measures.

To demonstrate trash load reductions, baseline trash loading rates will be adjusted using the following process:

- Step #1:** Existing Enhanced Street Sweeping
- Step #2:** Trash Generation Reduction
- Step #3:** On-Land Interception
- Step #4:** Trash Interception in the Stormwater Conveyance System
- Step #5:** Trash Interception in Waterways
- Step #6:** Comparison to Baseline Trash Load

Reductions calculated in Steps 2 and 5 are assumed to be implemented at a constant rate on an “area-wide” basis. For example, if a new region-wide public education strategy is implemented within the San Francisco Bay area, all Permittees can apply load reduction credits associated with this control measure. In contrast, Steps 1, 3 and 4 are “area-specific” reductions that only apply to specific areas within a Permittee’s jurisdiction. Area-specific control measures include full-capture treatment devices and enhanced street sweeping. Area-specific reductions may require the use of a Geographic Information System (GIS) to calculate.

Reductions are generally applied in the sequence as presented in Figure 2-1 and described below, although some reductions may be applied “in-parallel” and calculated during the same sub-step in the process.

Step #1: Existing Enhanced Street Sweeping

Trash load reductions due to existing enhanced street sweeping implemented prior to the effective date of the MRP and conducted at levels above baseline levels are not incorporated into each Permittee’s trash baseline load. Therefore, load reductions associated with existing enhanced are accounted for first in the trash load reduction calculation process. Existing enhanced street sweeping includes street sweeping conducted at a frequency greater than 1x/week for streets within retail land use areas or greater than 2x/month for streets in all other land use areas. The result of adjustments made to trash baseline loads due to the implementation of existing enhanced street sweeping is a set of current baseline loading rates and a current baseline load.

Step #2: Trash Generation Reduction Control Measures

Trash generation reduction control measures prevent or greatly reduce the likelihood of trash from being deposited onto the urban landscape. They include the following area-wide control measures:

- CR-1: Single-Use Carryout Plastic Bag Ordinances
- CR-2: Polystyrene Foam Food Service Ware Ordinances
- CR-3: Public Education and Outreach Programs
- CR-4: Reduction of Trash from Uncovered Loads
- CR-5: Anti-Littering and Illegal Dumping Enforcement
- CR-6: Improved Trash Bin/Container Management
- CR-7: Single-Use Food and Beverage Ware Ordinances

Load reductions associated with trash generation reduction control measures are applied on an area-wide basis.² Therefore, reductions in current baseline loading rates are adjusted uniformly based on the implementation of the control measure and the associated credit claimed.

Baseline loading rate adjustments for all generation reduction controls measures implemented may be applied in-parallel, but should be applied prior to calculating on-land interception measures discussed in Step #3. The result of adjustments to trash baseline loading rates due to the implementation of these enhanced control measures will be a set of street loading rates. The street load is the volume of trash estimated to enter the environment and available for transport to the MS4 if not intercepted via on-land control measures described in Step #2.

Step #3: On-land Interception Control Measures

Once trash enters the environment, it may be intercepted and removed through the following control measures prior to reaching the stormwater conveyance system:

- QF-1: On-Land Trash Cleanups (Volunteer and/or Municipal) (Area-Wide)
- QF-2: Enhanced Street Sweeping (Area-Specific)

Since on-land trash cleanups can affect the amount of trash available to street sweepers, load reductions associated with their implementation will be quantified first, followed by street sweeping enhancements. On-land trash cleanups will be applied as an area-wide reduction and all effective loading rates will be adjusted equally. Enhanced street sweeping, however, is an area-specific control measure and only those effective loading rates associated with areas receiving enhancements will be adjusted. Due to the spatial nature of enhanced street sweeping, GIS may be needed to conduct this step.

The result of adjustments to effective loading rates due to the implementation of these enhanced control measures will be a set of conveyance system loading rates. The conveyance load is the volume of trash estimated to enter the stormwater conveyance system (e.g., storm drains).

² The only exception to this statement are load reductions associated with the establishment of Business Improvement Districts (BIDs) or equivalent, which are specific to geographic areas and considered "area-specific".

Step #4: Control Measures that Intercept Trash in the MS4

Control measures that intercept trash in the stormwater conveyance system are area-specific. Therefore, they only apply to land areas and associated trash loads reduced. Conveyance system loading rates developed as a result of Step #3 should be adjusted in-parallel for the following control measures:

- QF-3a: Partial-capture Treatment Device: Curb Inlet Screens (Area-Specific)
- QF-3b: Partial-capture Treatment Device: Stormwater Pump Station Trash Racks Enhancements (Area-Specific)
- QF-4: Enhanced Storm Drain Inlet Maintenance (Area-Specific)
- QF-5: Full-Capture Treatment Devices (Area-Specific)

Load reductions for these control measures are calculated in-parallel because they are applied to independent geographical areas. Reductions from all control measures described in this step are area-specific and may require the use of GIS to calculate a set of waterway loading rates. Once waterway loading rates have been determined, a waterway load will be developed and used as a starting point for calculating load reductions associated with trash interception in waterways discussed in Step #5.

Step #5: Control Measures that Intercept Trash in Waterways

The load of trash that passes through the stormwater conveyance system without being intercepted may still be removed through interception in waterways. There are two control measures associated with interception in waterways:

- QF-3c: Partial-Capture Treatment Device: Litter Booms/Curtains (Area-Wide)
- QF-7: Creek/Channel/Shoreline Cleanups (Volunteer and/or Municipal) (Area-Wide)

As these control measures are implemented, load reduction estimates can be calculated in-parallel for these two measures.

Step #6: Comparison to Baseline Trash Load

Applying the four steps described in the processes above will provide an estimated trash load (volume) remaining after trash control measures are implemented. As depicted in the following equation, the relative percent difference between the baseline load and the load remaining after control measures are implemented is the percent reduction that will be used to assess progress towards MRP trash load reduction goals.

$$\frac{\text{Baseline Load} - \text{Remaining Load}}{\text{Baseline Load}} = \% \text{ Reduction}$$

4.0 ENHANCED TRASH CONTROL MEASURES

This section describes the new or enhanced trash control measures planned for implementation by the City of Suisun City. The enhanced control measures described are designed to reach a 40% reduction by July 1, 2014. New and enhanced control measures that will be implemented by City of Suisun City include those listed in Table 4.1.

Table 4.1.: Trash control measures that will be implemented by City of Suisun City to reach the 40% trash load reduction.

| Control Measure |
|---|
| Public Education and Outreach Programs |
| Anti-Littering and Illegal Dumping Enforcement Activities |
| On-Land Trash Pickup (Volunteer and/or Municipal) |
| Partial-Capture Treatment Devices |
| Full-Capture Treatment Devices |
| Creek/Channel/Shoreline Cleanups (Volunteer and/or Municipal) |

CR-3: Public Education and Outreach Programs

Permittees in the San Francisco Bay Area have implemented public education and outreach programs to inform residents about stormwater issues relating to pollutants of concern, watershed awareness and pollution prevention. Public education and outreach efforts include developing and distributing brochures and other print media; posting messages on websites and social networking media (Facebook, Twitter etc.), attending community outreach events, and conducting media advertising. In recent years, some municipal agencies have implemented anti-litter campaigns to increase public awareness about the impacts of litter on their communities and water quality; and to encourage the public to stop littering.

Baseline Level of Implementation

The City of Suisun City implemented the following public education and outreach control measures prior to the effective date of the MRP:

School Water Education Program

The School Water Education Program (SWEP) provides free water education resources to teach water awareness and conservation to students. The in class education programs as well as the resource materials and assembly programs are multidisciplinary outlined to the content standards for California public schools. The programs encourage students and adults to develop a healthy attitude of personal responsibility towards our environment.

Clean Water Outreach Program

This program is a CWEA 2011 Public Outreach and Education Award Winner. It consists of, among other things, the high school science curriculum focused on studying urban runoff from school sites to local streams, followed by a student designed action project. The goals of the program are to help young adults understand the consequences of stormwater pollution like illegal dumping, and to support behavior changes.

The Watershed Explorers Program

This program utilizes science and place-based learning to build awareness and understanding of local creeks in our watersheds. Students learn the importance of water quality in the watershed and discover that it is negatively impacted by urban runoff and its components, including trash.

New actions or actions started prior to the effective date of the MRP and continued into the future are described under the next section.

Enhanced Level of Implementation

The City of Suisun City will implement the following enhanced public education and outreach control measures prior to July 1, 2014.

Advertising Campaigns

The City will participate through the Program in an advertising campaign on trash/litter in waterways with the goal of significantly increasing overall awareness of stormwater runoff pollution prevention messages and behavior changes in a target audience. The advertising campaign will include the following attributes:

- Specific anti-littering messages for reducing litter
- A comprehensive advertising plan designed to reach the target audience
- Pre and post-campaign surveys which identify and quantify the audiences' knowledge, trends and attitudes and/or practices; and measures the overall population's awareness of the messages and behavior changes achieved by the campaign.

Outreach to School-Age Children or Youth

The City will participate through the Program in an active implementation of outreach programs (e.g., assemblies, presentations, etc.) designed to promote anti-littering behavior in school-age children (K through 12). Outreach programs will be community-based and/or grassroots in nature, and include an evaluation component (e.g., teacher or student feedback) to determine effectiveness. The programs delineated above, as baseline, will be continued and enhanced with emphasis being placed on an anti-trash message.

Media Relations (Use of Free Media)

The City will participate through the Program in a media relations campaign which will use free media/media coverage (i.e., public service announcements and free advertising spots) focusing on litter issues (e.g., publicity of local creek/neighborhood cleanups, steps initiated to alleviate trash from homeless encampments, etc.). The media relations campaign will be designed to significantly increase the overall awareness of anti-litter messages and associated behavior change in target audiences.

Community Outreach Events

The City will participate in the organization of focused outreach and education programs at an implementation level listed in Table CR-3.2 of the Trash Load Reduction Tracking Method Technical Report. The programs will be focused in high priority communities where litter is prevalent. Outreach programs will be community-based and/or grassroots in nature, and include an evaluation component (e.g., participant feedback) to determine effectiveness.

Percent Reduction from Enhancements

The City of Suisun City will receive an 8 percent reduction credit for implementing specific enhanced control measures described in *Enhanced Level of Implementation* section above. The 8 percent reduction credit will be applied to the City of Suisun City's baseline trash load. This percent reduction credit is consistent with methods presented in the BASMAA (2011e). A summary of all load reductions anticipated through the implementation of this plan are included in Section 4.0.

CR-5: Anti-Littering and Illegal Dumping Enforcement Activities

Successful anti-littering and illegal dumping enforcement activities include laws or ordinances that make littering or dumping of trash illegal. Laws are enforced by various municipal agency staff (e.g., police, sheriff and public works department staff) who issue citations in response to citizen complaints or other enforcement methods (e.g., surveillance cameras, signage and/or physical barriers installed at illegal dumping hot spots). In some California jurisdictions, the minimum fine for littering is \$500 and the maximum penalty for highway littering is \$1000 (city of San Francisco 2001). However, it is difficult to enforce small littering events unless they are witnessed or solid proof exists linking the offender to the litter. As a result, enforcement tends to focus on larger scale illegal dumping activities.

Baseline Level of Implementation

The baseline trash load described in Section 2.0, assumes that the City of Suisun City has adopted a basic anti-littering and illegal dumping enforcement program that entails receiving and responding to complaints from citizens as resources allow. Prior to the implementation of the MRP, the City focused on the following control measures:

- Anti-litter and recycling informational articles in City's Discovery newsletter
- Recycling and anti-litter information on City's web page
- Regular inspection for illegal dumping/trash in Maintenance Assessment Districts (MAD) as well as City owned properties/locations
- In-house weekly trash pickup in non-MAD areas
- Weekly trash pickup by landscape contractor in MAD areas

Prior to adoption of the MRP the City was attempting to respond to complaints of illegal dumping within a 24-hour period. The City's response includes:

- Removal of debris by Public Works Maintenance staff during working hours
- Notifying the appropriate Code Enforcement Officer – Code Enforcement Officer tries to get on-site prior to debris removal to look for anything that can tie the debris back to an owner

Enhanced Level of Implementation

The City of Suisun City has implemented and/or will implement the following enhanced anti-littering and illegal dumping enforcement control measures prior to July 1, 2014:

- The City will move towards enhancing existing data collection for debris separation
- The City will enhance existing training programs with regards to debris and trash for debris separation
- The City will enhance existing training for Code Enforcement Officer(s)
- The City will enhance outreach to the public regarding illegal dumping awareness via the City's webpage

Anti-littering and illegal dumping enforcement program will include:

- Code Enforcement Officer(s) will investigate dumping complaints as staffing levels allow
- Code Enforcement Officer(s) will continue to attempt to collect evidence from illegal dump sites in an attempt to identify offenders

Percent Reduction from Enhancements

The City of Suisun City will receive a 2 percent reduction credit for implementing specific enhanced control measures described in *Description of Enhanced Level of Implementation* section above. The 2 percent reduction credit will be applied to the baseline trash load to urban creeks from the municipal separate storm sewer system (MS4) owned and operated by the City of Suisun City. This percent reduction credit was obtained from the *Trash Load Reduction Tracking Method Report* (BASMAA 2011e) and is presented in the Trash Load Reduction Summary Table included in Section 5.

QF-1: Enhanced On-Land Trash Cleanups (Volunteers and/or Municipal)

On-land cleanups conducted by Permittees and volunteers have been successful in removing trash from identified trash hot spots and engaging local citizenry in improving their communities. Permittees have several programs in place to address on-land trash. Municipal efforts relate to ongoing beautification of impacted areas and coordination of cleanup events. Volunteer on-land cleanups involve the meeting of individuals, creek and watershed groups, civic organizations, businesses and others at designated or adopted on-land sites to remove trash. On-land trash cleanups are conducted as single-day efforts or throughout the year.

Baseline Level of Implementation

The City of Suisun City implemented the following on-land cleanup activities prior to the effective date of the MRP:

- Removal of illegal roadside dumping debris
- Cleanup of homeless encampments
- Weekly trash pickup by in-house staff in non-MAD areas
- Weekly trash pickup by landscape contractor in MAD areas

These control measures are considered baseline because they were accounted for in the preliminary trash generation rates established through the BASMAA *Baseline Trash Loading Rates Project*. New or enhanced actions that began or are planned to begin after the effective date of the MRP are described under the next section.

Enhanced Level of Implementation

Prior to July 1, 2014, the City of Suisun City will be conducting or coordinating the following new or enhanced on-land trash cleanup activities listed below. These on-land cleanups will be conducted or coordinated each year and the volume of trash removed will be tracked to demonstrate trash loads reduced.

Please note that only trash that has the potential of entering the MS4 will be tracked. As a result, large items (e.g., appliances, shopping carts, furniture, mattresses, televisions, tires, lumber, etc.) that will be

removed during on-land trash cleanups are not part of the volume determination since they do not have the potential of entering the MS4.

The City of Suisun City has implemented and/or will implement the following enhanced on-land cleanup measures prior to July 1, 2014:

- The City will enhance existing training programs with regards to the quantification of materials removed from a site
- The City will enhance existing training for Code Enforcement Officer(s)
- The City will enhance outreach to the public regarding illegal dumping awareness via the City's webpage

Percent Reduction from Enhancements

The total estimated annual volume of trash that will be reduced beginning July 1, 2014 as a result of implementing on-land trash cleanups is 720 gallons. This volume is equal to approximately a 28.7 percent reduction in the baseline trash load to urban creeks from the municipal separate storm sewer system (MS4) owned and operated by the City of Suisun City. Both values provided within this section are included in Trash Load Reduction Summary Table included in Section 5.

QF-3: Partial-Capture Treatment Devices

Partial-capture devices are treatment devices that have not been approved as full-capture by the San Francisco Bay Regional Water Quality Control Board, but capture trash at a known effectiveness value. Partial-capture devices may be similar to full-capture devices, but do not meet the full capture definition due to engineering challenges; or they may be completely different types of devices. Partial-capture devices include curb inlet screens (e.g., automated retractable screens), litter booms/curtains and stormwater pump station trash racks. Trash loads reduced via partial-capture devices within a Permittee's jurisdictional boundaries may be used to demonstrate attainment of trash load reduction goals.

Baseline Level of Implementation

Stormwater Pump Station Trash Racks

Similar to the devices described above, some Permittees within the Bay area have installed and maintained trash racks on their stormwater pump stations. Existing pump station trash racks are assumed to remove roughly 25% of the trash that enters the pump station (BASMAA 2011e). The baseline trash load removed via these devices is accounted for in baseline trash loads.

The City of Suisun City owns four stormwater pump stations, all of these stormwater pump stations have trash racks which qualify for the 25% trash reduction for their contributing area.

QF-5: Full-Capture Treatment Devices

As defined by the Municipal Regional Stormwater Permit (MRP), a full-capture system or device is any single device or series of devices that traps all particles retained by a 5 mm mesh screen and has a design treatment capacity of not less than the peak flow rate (Q) resulting from a one-year, one-hour, storm in the sub-drainage area. A list of the full-capture systems and devices recognized by the San Francisco Bay Regional Water Quality Control Board (Water Board) is included in *Trash Load Reduction Tracking Method Report* (BASMAA 2011e). Trash loads reduced via publically or privately owned and operated devices within a Permittee's jurisdictional area that have been recognized by the Water Board as full-capture may be used to demonstrate attainment of trash load reduction goals.

Baseline Level of Implementation

Prior to adoption of the MRP, some Permittees installed and maintained full capture devices. To avoid penalizing these early implementers, an applicable control measure implemented within a Permittee's jurisdictional area prior to the effective date of the MRP will be credited equally to a control measure implemented after the effective date. Therefore, the baseline level of implementation is no trash full-capture devices have been installed.

Enhanced Level of Implementation

A total of one trash full-capture treatment devices will be installed in the City of Suisun City prior to July 1, 2014. A list of these full-capture devices is included in Table QF-6-1. All devices listed within this table are enhanced trash control measures. Table QF-6-1 also includes the area treated and the calculated trash load reduced from each full-capture treatment device. These calculations are consistent with the approach described in the *Trash Load Reduction Tracking Method Report* (BASMAA 2011e).

The device being installed is a CDS unit which will be located in Suisun City with the contributing area located in the city of Fairfield. The total contributing area for the CDS unit is 270 acres. The cost of the installation and the credit for the contributing area is being divided between the two cities based on their populations. Suisun City will be credited 20% of the total contributing area.

Percent Reduction from Enhancements

The total estimated annual volume of trash that will be reduced by July 1, 2014 as a result of implementing full capture devices is 78 gallons. This volume is equal to approximately a 3 percent reduction in the baseline trash load to urban creeks from the municipal separate storm sewer system (MS4) owned and operated by the City of Suisun City. Both values provided within this section are included in Trash Load Reduction Summary Table included in Section 5.

Table QF-6-1. Trash full-capture treatment devices within the jurisdictional boundaries of the City of Suisun City that are planned for installation by July 1, 2014.

| Device ID | Public or Private | Device Name | Location (Cross Streets) | Installation Date/Anticipated Installation Date | Total Area Treated (acres) | Trash Load Reduced |
|-----------|-------------------|-------------|--------------------------|---|----------------------------|--------------------|
| 1 | Public | SPRR ditch | Railroad Avenue | April 2012 | 270 (54 to Suisun) | 78 gallons |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

QF-6: Creek/Channel/Shoreline Cleanups

Creek/channel/shoreline cleanups have been successful in removing large amounts of trash from San Francisco Bay area creeks and waterways; and increasing citizen's awareness of trash issues within their communities. Creek/channel/shoreline cleanups are conducted as single-day events or throughout the year by volunteers and municipal agencies. Since volunteers and municipal agencies have the common goal of clean creeks and waterways, their efforts sometimes overlap. This is apparent with some municipal agencies using volunteers to help assess and clean designated trash hot spots during single-day volunteer events.

Baseline Level of Implementation

Trash reduced via creek/channel/shoreline cleanups was not accounted for in City of Suisun City's baseline trash load described in Section 2.0. Therefore, implementation of any of the control measures described in this section is considered to be an enhancement and can be used to demonstrate progress towards load reduction goals.

Enhanced Level of Implementation

Prior to July 1, 2014, the City of Suisun City will conduct MRP-required³ and the following non MRP-required creek/channel/shoreline cleanups⁴ listed below. Both types of cleanups will be conducted each year and the volume of trash removed will be tracked to demonstrate trash loads reduced.

Non MRP-required creek/channel/shoreline cleanups may include the following:

Single-Day Efforts - Permittee & Volunteer Collaborative Activities

- National River Cleanup Day (third Saturday in May)
- Coastal Cleanup Day (third Saturday in September)
- Other Organized Single-Day Events

On-Going Efforts - Permittee & Volunteer Collaborative Activities

- Other Organized Cleanup Efforts
- Individuals or Organized Groups
- Creek/Watershed Group
- Non-governmental Organizations (e.g., Save the Bay, etc.)

On-Going Permittee-Led Cleanup Activities

- Removal of Homeless Encampments
- Routine or Regularly Scheduled Creek Maintenance
- Illegal Dump Site Correction
- Other On-Going Cleanup Efforts

³ Creek/channel/shoreline cleanups conducted in accordance with Permit Provision C.10.b.

⁴ All "other" creek/channel/shoreline cleanups conducted by a municipality that are not required by Provision C.10.b.

Percent Reduction from Enhancements

The total estimated annual volume of trash that will be reduced by July 1, 2014 as a result of implementing creek/channel/shoreline cleanups is 194 gallons/year. This volume is equal to approximately a 7.8 percent reduction in the baseline trash load to urban creeks from the municipal separate storm sewer system (MS4) owned and operated by the City of Suisun City. Both values provided within this section are included in Trash Load Reduction Summary Table included in Section 5.

5.0 SUMMARY OF TRASH CONTROL MEASURE ENHANCEMENTS

The City of Suisun City is committed to reducing the potential for trash impacts in local water bodies in the San Francisco Bay Area. The planned enhanced trash control measures described in Section 3.0 are also listed in Table 5-1. The enhancements are intended to comply with the 40% trash load reduction goal in MRP Provision C.10.

Table 5-1. Planned enhanced trash control measure implementation within the jurisdictional boundaries of the City of Suisun City and associated trash loads reduced.

| Trash Control Measure | Summary Description of Control Measure | % Reduction (Credits) | Trash Load Reduced (gallons) | Cumulative % Reduction (Compared to Baseline) |
|--|--|-----------------------|------------------------------|---|
| Single-use Carryout Plastic Bag Ordinance (CR-1) | Reserved for potential future implementation | 0 | 0 | 0 |
| Polystyrene Foam Food Service Ware Ban (CR-2) | Reserved for potential future implementation | 0 | 0 | 0 |
| Public Education and Outreach Programs (CR-3) | Enhance existing public education efforts to emphasize trash reduction | 8 | 201 | 8 |
| Activities to Reduce Trash from Uncovered Loads (CR-4) | Reserved for potential future implementation. | 0 | 0 | 8 |
| Anti-littering and Illegal Dumping Enforcement Activities | Enhanced investigations and tracking of complaints received from an illegal dumping hot line; implementation of enforcement procedures including citations; | 2 | 50 | 10 |
| Improved Trash Bin/Container Management (Municipally or Privately-Controlled) (CR-6) | Reserved for potential future implementation | 0 | 0 | 10 |
| Single-Use Food and Beverage Ware Ordinance (CR-7) | Reserved for potential future implementation | 0 | 0 | 10 |
| Enhanced On-land Trash Cleanups (Volunteer and/or Municipal) (QF-1) | Roadside illegal dump pickups; homeless encampment cleanups; Park and roadside cleanups; quality neighborhood trash cleanup events. | NA | 720 | 38.7 |
| Enhanced Street Sweeping (QF-2) – (Existing and Future Enhanced) | Reserved for potential future implementation | NA | 0 | 38.7 |
| Curb Inlet Screens (Partial-capture Treatment Device) (QF-3a) | Reserved for potential future implementation | NA | 0 | 38.7 |
| Enhanced Storm Drain Inlet Maintenance (QF-4) | Reserved for potential future implementation | NA | 0 | 38.7 |
| Full-capture Treatment Devices (QF-5) | Installation of large full capture CDS device. Device is located in the Suisun with contributing area Fairfield. Credit and maintenance is broken up with 80% going to Fairfield and 20% to Suisun city. | NA | 78 | 41.7 |
| Creek/Channel/Shoreline Cleanups (Volunteer and/or Municipal) (QF-6) | Coast and Creek Cleanup and other volunteer and municipal creek cleanup activities | NA | 194 | 49.5 |

5.1 Annual Reporting and Progress Towards Trash Load Reduction Goal(s)

Consistent with MRP Provision C.10.d (i), the City of Suisun City intends to report on progress towards MRP trash load reduction goals on an annual basis beginning with the Fiscal Year 2011-2012 Annual Report. Annual reports will include:

- A brief summary of all enhanced trash load reduction control measures implemented to-date
- The dominant types of trash likely removed via these control measures
- Total trash loads removed (credits and quantifications) via each control measure implementation
- A summary and quantification of progress towards trash load reduction goals

Similar to other MRP provision, annual reporting formats will be consistent region-wide. Annual reports are intended to provide a summary of control measure implementation and demonstrate progress toward MRP trash reduction goals. For more detailed information on specific control measures, the City of Suisun City will retain supporting documentation on trash load reduction control measure implementation. These records should have a level of specificity consistent with the trash load reduction tracking methods described in the *BASMAA Trash Load Reduction Tracking Method Technical Report* (BASMAA 2011e).

5.2 Considerations of Uncertainties

Baseline trash loading and load reduction estimates are based on the best available information at the time this Short-Term Trash Load Reduction Plan was developed. As with any stormwater loading and reduction estimate, a number of assumptions were used during calculations and therefore uncertainty is inherent in the baseline trash load estimate presented in Section 2.0 and the load reduction estimate presented in this section. For these reasons, the baseline loading estimates presented in this plan should be considered first-order estimates. During the implementation of this Short-Term Plan and subsequent plans, additional information may become available to allow the calculation of a more robust baseline load.

6.0 IMPLEMENTATION SCHEDULE

Implementation of enhanced trash control measures by the City of Suisun City is currently planned to occur in a timeframe consistent with MRP requirements. A preliminary implementation schedule for all planned enhancements is described in Table 5-1. This schedule provides a timeframe for reducing trash discharged from the City of Suisun City's MS4 by 40%.

Based on new information that becomes available during the implementation of this Short-Term Plan (e.g., revisions to baseline loading estimates or load reduction credits of quantification formulas), the City of Suisun City may choose to amend or revise this Plan and/or the associated implementation schedule. If revisions or amendments occur, a revised Short-Term Trash Load Reduction Plan and implementation schedule will be submitted to the Water Board via the City of Suisun City's annual reporting process.

Table 5-1. Preliminary implementation schedule for enhanced trash control measures in the 1.

| Trash Control Measure | Beginning Date of Implementation |
|--|---|
| Single-Use Carryout Plastic Bag Ordinance (CR-1) | N/A |
| Polystyrene Foam Food Service Ware Ban (CR-2) | N/A |
| Public Education and Outreach Programs (CR-3) | Summer 2012 |
| Activities to Reduce Trash from Uncovered Loads (CR-4) | N/A |
| Anti-Littering and Illegal Dumping Enforcement Activities (CR-5) | Summer 2012 |
| Improved Trash Bin/Container Management (Municipally or Privately-Controlled) (CR-6) | N/A |
| Single-Use Food and Beverage Ware Ordinance (CR-7) | N/A |
| On-Land Trash Cleanups (Volunteer and/or Municipal) (QF-1) | Spring 2012 |
| Enhanced Street Sweeping (QF-2) | N/A |
| Curb Inlet Screens (Partial-Capture Treatment Device) (QF-3a) | N/A |
| Enhanced Storm Drain Inlet Maintenance (QF-4) | N/A |
| Full-capture Treatment Devices (QF-5) | Summer 2012 |
| Creek/Channel/Shoreline Cleanups (Volunteer and/or Municipal) (QF-6) | Spring 2012 |

7.0 REFERENCES

- Allison R.A. and F.H.S. Chiew 1995. Monitoring stormwater pollution from various land uses in an urban catchment. Proceedings from the 2nd International Symposium on Urban Stormwater Management, Melbourne, 551-516.
- Allison, R.A., T.A. Walker, F.H.S. Chiew, I.C. O'Neill and T.A McMahon 1998. From Roads to rivers: Gross pollutant removal from urban waterways. Report 98/6. Cooperative Research Centre for Catchment Hydrology. Victoria, Australia. May 1998.
- Armitage, N. 2001. The removal of Urban Litter from Stormwater Drainage Systems. Ch. 19 in Stormwater Collection Systems Design Handbook. L. W. Mays, Ed., McGraw-Hill Companies, Inc. ISBN 0-07-135471-9, New York, USA, 2001, 35 pp.
- Armitage, N. 2003. The removal of urban solid waste from stormwater drains. Prepared for the International Workshop on Global Developments in Urban Drainage Management, Indian Institute of Technology, Bombay, Mumbai India. 5-7 February 2003.
- Armitage, N. 2007. The reduction of urban litter in the stormwater drains of South Africa. Urban Water Journal Vol. 4, No. 3: 151-172. September 2007.
- Armitage N., A. Rooseboom, C. Nel, and P. Townshend 1998. "The removal of Urban Litter from Stormwater Conduits and Streams. *Water Research Commission* (South Africa) Report No. TT 95/98, Pretoria.
- Armitage, N. and A. Rooseboom 2000. The removal of urban litter from stormwater conduits and streams: Paper 1 – The quantities involved and catchment litter management options. Water S.A. Vol. 26. No. 2: 181-187.
- BASMAA (Bay Area Stormwater Management Agencies Association). 2011a. Progress Report on Methods to Estimate Baseline Trash Loads from Bay Area Municipal Stormwater Systems and Track Loads Reduced. February 2011.
- BASMAA (Bay Area Stormwater Management Agencies Association). 2011b. Method to Estimate Baseline Trash Loads from Bay Area Municipal Stormwater Systems: Technical Memorandum #1. Prepared by EOA, Inc. April 2011.
- BASMAA (Bay Area Stormwater Management Agencies Association). 2011c. Sampling and Analysis Plan. Prepared by EOA, Inc. April 2011.
- BASMAA (Bay Area Stormwater Management Agencies Association). 2011d. Trash Load Reduction Tracking Method: Technical Memorandum #1 – Literature Review. Prepared by EOA, Inc. May 2011.
- BASMAA (Bay Area Stormwater Management Agencies Association). 2011e. Trash Load Reduction Tracking Method: Technical Report. Prepared by EOA, Inc. XXXX 2011
- BASMAA (Bay Area Stormwater Management Agencies Association). 2012. Trash Baseline Generation Rates: Technical Report. Prepared by EOA, Inc. XXXX 2012.
- County of Los Angeles. 2002. Los Angeles County Litter Monitoring Plan for the Los Angeles River and Ballona Creek Trash Total Maximum Daily Load. May 30, 2002.
- County of Los Angeles. 2004a. Trash Baseline Monitoring Results Los Angeles River and Ballona Creek Watershed. Los Angeles County Department of Public Works. February 17, 2004.

County of Los Angeles 2004b. Trash Baseline Monitoring for Los Angeles River and Ballona Creek Watersheds. Los Angeles County Department of Public Works. May 6, 2004.

County of Los Angeles, Department of Public Works, Environmental Programs Division. 2007. *An Overview of Carryout Bags in Los Angeles County: A Staff Report to the Los Angeles County Board of Supervisors*. Alhambra, CA. http://dpw.lacounty.gov/epd/PlasticBags/PDF/PlasticBagReport_08-2007.pdf. August 2007.

Kim, L.H, M. Kayhanian, M.K. Stenstrom 2004. Event mean concentration and loading of litter from highways during storms. *Science of the Total Environment* Vol 330: 101-113.